


通用交联聚烯烃绝缘起动机或接地装置电缆 SGX
All-purpose XLPE insulation Auto Wire with low tension - SGX

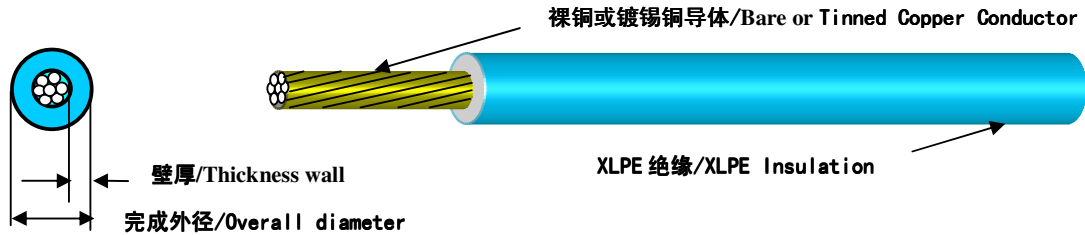

产品执行标准/Product executive standard:

SAE J 1127/2005 低压初级电缆/Low Tension Primary Cable

Description:

Bare or Tinned stranded copper conductor; 6-4/0 AWG
 Temperature range: -40~125℃;
 Thermosetting and good mechanical characters
 XLPE material of insulation.
 Easy stripping and cutting.
 Resistant to acids, alkalis, oils, moisture and fungi.

说明:

导体使用裸铜或镀锡铜绞线，6-4/0AWG
 温度范围：-40~125℃；
 XLPE 绝缘，优良热稳定性和机械性能
 易开线和剥皮。
 抗酸碱，耐油及防潮霉性能好。

Application:

It's applicable to low tension primary wire of electric system for auto within.

应用:

适用于汽车内部电气系统用低压电线

Specification: 技术参数:

型号 Type	线规 AWG	导体结构 Conductor size (No./AWG)	导体外径 Conductor Dia. (mm)	绝缘厚度 Insulation thickness (mm)		完成外径 Overall diameter (mm)	包装尺寸 Package size FT/R
				Nom.	Min.		
SGX-6	6	7/38/0.254	5.41	1.52	1.06	8.45±0.20	500
SGX-4	4	7/60/0.254	6.82	1.65	1.14	10.10±0.20	500
SXL-3	3	7/76/0.254	7.67	1.65	1.14	11.00±0.25	500
SGX-2	2	7/95/0.254	8.58	1.65	1.14	11.90±0.25	500
SGX-1	1	19/44/0.254	9.72	1.65	1.14	13.00±0.25	500
SGX-1/0	1/0	19/55/0.254	10.88	1.65	1.14	14.20±0.30	500
SGX-2/0	2/0	19/70/0.254	12.26	1.65	1.14	15.55±0.30	500
SGX-3/0	3/0	19/88/0.254	13.76	1.98	1.4	17.70±0.30	500
SGX-4/0	4/0	19/111/0.254	15.45	1.98	1.4	19.40±0.30	500

单导体公差/Conductor tolerance: +/-0.005mm 订货资料/Order reference: :

可选颜色 (SAE 标准色系) : 黑, 白, 黄, 绿, 蓝, 棕, 灰, 橙, 紫, 黄绿。

Colors available: black, white, yellow, green, blue, brown, gray, orange, violet, yellow-green

交货日期/Delivery :7 days after accepting purchase orders. 接到订单后 7 天。