


薄壁聚氯乙烯绝缘汽车电缆 STT SAE1127
PVC insulation Auto wire of style STT with standard SAE1127

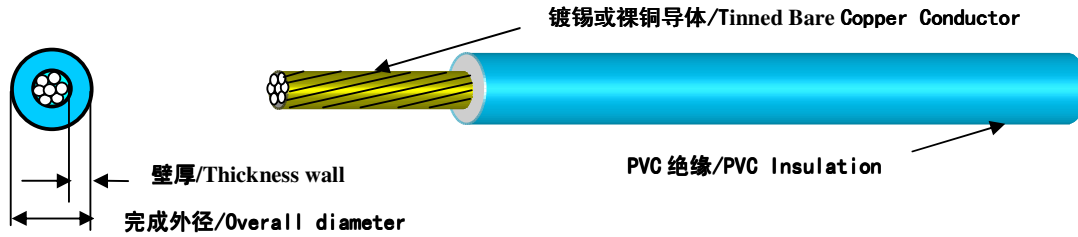

产品执行标准/Product executive standard:

SAE J 1127/2005 低压初级电缆/Low Tension Primary Cable

Description:

Bare or tinned stranded copper conductor; 6-4/0 AWG
 Temperature range: -40~100℃; Rated voltage: 50 volts
 Thermosetting and good mechanical characters
 PVC material of insulation.
 Easy stripping and cutting.
 Resistant to acids, alkalis, oils, moisture and fungi.

说明:

导体使用裸铜或镀锡铜绞线，6-4/0 AWG
 温度范围：-40~90℃；额定电压：50V
 PVC 绝缘，优良热稳定性和机械性能
 易开线和剥皮。
 抗酸碱，耐油及防潮霉性能好。

Application:

It's applicable to low tension primary wire of electric system for auto within.

应用:

适用于汽车内部电气系统用低压电线

Specification: 技术参数:

规格 AWG	导体结构 Conductor size (No./mm)	导体外径 Conductor Dia.(mm)	绝缘厚度 Insulation thickness (mm)		完成外径 Overall diameter (mm)		包装尺寸 Package size FT/R
			Min.	Average	Average	Max.	
3	133/0.50	6.70	1.20		9.10		500
4	168/0.40	6.00	1.20		8.40		500
5	133/0.40	5.30	1.20		7.70		500
6	266/0.254	5.43	1.20		7.85		500

单支导体公差/Conductor tolerance: +/-0.005mm 订货资料/Order reference: :

可选颜色 (SAE 标准色系): 黑, 白, 黄, 绿, 蓝, 棕, 灰, 橙, 紫, 黄绿。

Colors available: black, white, yellow, green, blue, brown, gray, orange, violet, yellow-green

交货日期/Delivery :7 days after accepting purchase orders. 接到订单后 7 天。