


通用热塑性绝缘起动机或接地装置电缆 SGT
All-purpose Thermoplastic insulation Auto Wire with low tension - SGT

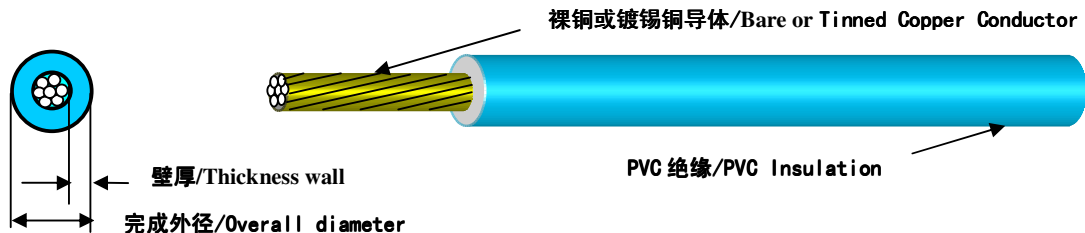

产品执行标准/Product executive standard:

SAE J 1127/2005 低压初级电缆/Low Tension Primary Cable

Description:

Bare or Tinned stranded copper conductor; 6-4/0 AWG
 Temperature range: -40~90℃;
 Thermosetting and good mechanical characters
 PVC material of insulation.
 Easy stripping and cutting.
 Resistant to acids, alkalis, oils, moisture and fungi.

说明:

导体使用裸铜或镀锡铜绞线，6-4/0AWG
 温度范围：-40~90℃；
 PVC 绝缘，优良热稳定性和机械性能
 易开线和剥皮。
 抗酸碱，耐油及防潮霉性能好。

Application:

It's applicable to low tension primary wire of electric system for auto within.

应用:

适用于汽车内部电气系统用低压电线

Specification: 技术参数:

型号 Type	线规 AWG	导体结构 Conductor size (No./AWG)	导体外径 Conductor Dia.(mm)	绝缘厚度 Insulation thickness (mm)		完成外径 Overall diameter (mm)		包装尺寸 Package size FT/R
				Average	Min.	Average	Max.	
SGT-6	6	37/0.724	5.10	1.52	1.06	8.14	8.63	500
SGT-4	4	61/0.643	5.80	1.65	1.16	9.10	10.67	500
SGT-2	2	127/0.574	7.46	1.65	1.16	10.76	12.83	500
SGT-1	1	127/0.643	8.36	1.65	1.16	11.66	14.15	500
		259/0.455	9.58	1.65	1.16	12.88	13.28	500
SGT-1/0	1/0	127/0.724	9.42	1.65	1.16	12.72	15.24	500
SGT-2/0	2/0	127/0.813	10.58	1.65	1.16	13.88	16.64	500
SGT-3/0	3/0	7/37/0.643	13.50	1.98	1.40	16.80	19.05	500
SGT-4/0	4/0	19/22/0.574	15.46	1.98	1.40	18.76	20.57	500

单支导体公差/Conductor tolerance: +/-0.005mm 订货资料/Order reference: :

可选颜色 (SAE 标准色系) : 黑, 白, 黄, 绿, 蓝, 棕, 灰, 橙, 紫, 黄绿。

Colors available: black, white, yellow, green, blue, brown, gray, orange, violet, yellow-green

交货日期/Delivery :7 days after accepting purchase orders. 接到订单后 7 天。