


薄壁热塑性绝缘低压汽车电线 TWP
Thermoplastic insulation Auto Wire with low tension and thin wall - TWP

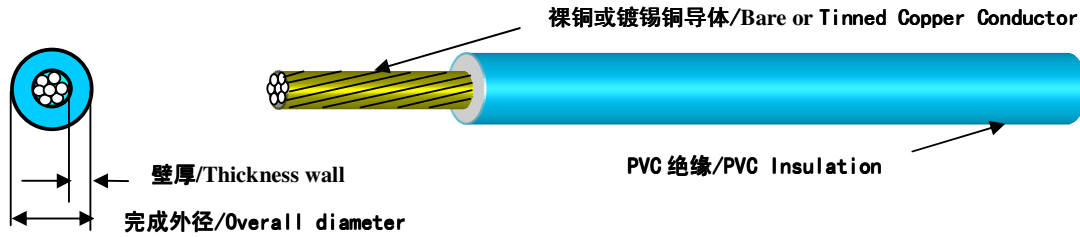

产品执行标准/Product executive standard:

SAE J 1128/2005 低压初级电缆/Low Tension Primary Cable

Description:

Bare or Tinned stranded copper conductor; 24-8AWG
 Temperature range: -40~90°C; Rated voltage: 50 volts
 Thermosetting and good mechanical characters
 PVC material of insulation.
 Easy stripping and cutting.
 Resistant to acids, alkalis, oils, moisture and fungi.

说明:

导体使用裸铜或镀锡铜绞线，24-8AWG
 温度范围：-40~90°C；额定电压：50V
 PVC 绝缘，优良热稳定性和机械性能
 易开线和剥皮。
 抗酸碱，耐油及防潮霉性能好。

Application:

It's applicable to low tension primary wire of electric system for auto within.

应用:

适用于汽车内部电气系统用低压电线

Specification: 技术参数:

型号 Type	线规 AWG	导体结构 Conductor size (No./AWG)	导体外径 Conductor Dia.(mm)	绝缘厚度 Insulation thickness (mm)		完成外径 Overall diameter (mm)		包装尺寸 Package size FT/R
				Average	Min.	Average	Max.	
TWP-8	8	168/0.254	3.80	0.55	0.39	4.90	4.90	500
TWP-10	10	105/0.254	3.00	0.50	0.35	4.00	4.09	500
TWP-11	11	56/0.30	2.60	0.50	0.35	3.60	3.60	500
TWP-12	12	65 / 0.254	2.40	0.45	0.32	3.30	3.35	1000
TWP-14	14	41 / 0.254	1.90	0.40	0.28	2.70	2.76	1000
TWP-16	16	26 / 0.254	1.50	0.40	0.28	2.30	2.41	1000
TWP-18	18	16 / 0.254	1.20	0.40	0.28	2.00	2.13	2000
TWP-20	20	7 / 0.30	0.96	0.40	0.28	1.75	1.93	2000
TWP-22	22	7/0.254	0.79	0.40	0.28	1.60	1.70	2000
TWP-24	24	7/0.20	0.61	0.40	0.28	1.40	1.50	2000

单导体公差/Conductor tolerance: +/-0.005mm 订货资料/Order reference: :

可选颜色 (SAE 标准色系) : 黑, 白, 黄, 绿, 蓝, 棕, 灰, 橙, 紫, 黄绿。

Colors available: black, white, yellow, green, blue, brown, gray, orange, violet, yellow-green

交货日期/Delivery :7 days after accepting purchase orders. 接到订单后 7 天。