




美国军用电线 MIL-W-22759/11

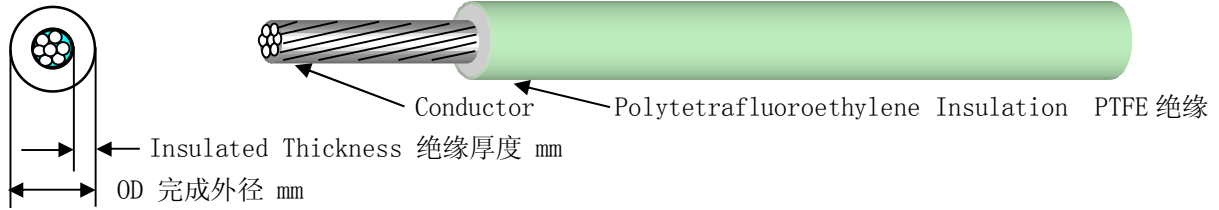

引用标准:

MIL-W-22759/11

使用材质:

聚四氟乙烯 PTFE (POLYTETRAFLUOROETHYLENE) 材质绝缘, 额定温度: 200°C; 额定电压: 600V。

应用范围:

应用于海军司令部及国防部相关的各个部门。

标准规格参数:

PIN	Wire size (AWG)	Stranding	Conductor		Conductor Diameter (mm)	Max. Resistance (ohm/km) At.20°C	Finished Wire Diameter (mm)	
			Material	Coating			Min	Max
M22759/11-08	08	133/29	Copper	Silver	4.11	2.16	5.03	5.23
M22759/11-10	10	37/26	Copper	Silver	2.74	3.90	3.43	3.63
M22759/11-12	12	19/25	Copper	Silver	2.18	5.94	2.74	2.90
M22759/11-14	14	19/27	Copper	Silver	1.70	9.45	2.24	2.34
M22759/11-16	16	19/29	Copper	Silver	1.35	14.8	1.85	1.96
M22759/11-18	18	19/30	Copper	Silver	1.19	19.0	1.68	1.78
M22759/11-20	20	19/32	Copper	Silver	0.97	30.1	1.42	1.52
M22759/11-22	22	19/34	Copper	Silver	0.76	49.5	1.19	1.30
M22759/11-24	24	19/36	Copper	Silver	0.61	79.7	1.04	1.14
M22759/11-26	26	19/38	Copper	Silver	0.48	126	0.91	1.02
M22759/11-28	28	7/36	Copper	Silver	0.38	209	0.79	0.89



Worldlink

--	--	--	--	--	--	--	--	--