




60227 IEC 08 (RV-90) 聚氯乙烯绝缘电缆

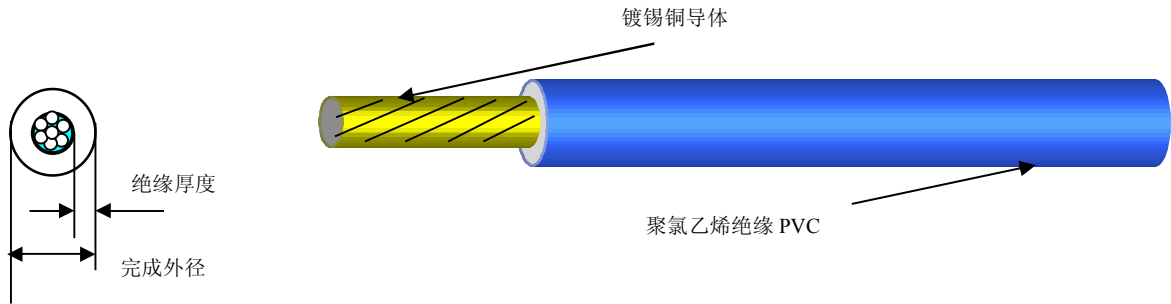


2002010105000751 **60227IEC08(RV-90)** **300/500V** **NO.mm2** **GB5023.3-2008** **Shenzhen**
Qifurui Electronics Co., Ltd.

Description:

Tinned stranded copper conductor ; 0.5~2.5mm²
 Rated temperature: 90℃, rated voltages: 300/500 volts
 Passed GB5023.3-2008 standards.
 Good mechanical characters, PVC material insulation.
 Easy stripping and cutting.
 Resistant to acids, alkalis, oils, moisture and fungi.

说明:

导体使用镀锡铜绞线 0.5~2.5mm²
 额定温度：90℃ 额定电压：300/500V
 通过 GB5023.3-2008 认证
 PVC 绝缘，优良热稳定性和机械性能
 易开线和剥皮。
 抗酸碱，耐油及防潮霉性能好。

Application:

For general purpose internal wiring of electronic
 Appliances where exposed to temperatures not
 Exceeding 90℃.

应用:

一般商用电子，电器及设备仪器内部
 连接线，变压器和灯具及电机引出线
 等环境温度不超过 90℃ 场合。

Specification: 技术参数:

型号 Type	规格 mm ²	导体结构 Conductor (NO.mm) ±0.005mm	导体电阻 Conductor resistance 20℃ (Ω/Km)	导体外径 Conductor Dia. (mm)	绝缘厚度 Insulation thickness (mm)	完成外径 Overall diameter (mm)	包装 package M/R
60227IEC08 (RV-90)	0.50	16/0.20	40.10	0.92	0.6	2.20±0.10	1000
	0.75	24/0.20	26.70	1.13	0.6	2.35±0.10	1000
	1.00	32/0.20	20.00	1.30	0.6	2.55±0.10	1000
	1.50	30/0.25	13.70	1.58	0.7	3.00±0.15	500
	2.50	49/0.25	8.21	2.02	0.8	3.60±0.15	500

conductor tolerance 单支导体公差: +/-0.005mm, wire tolerance 导线外径公差: O D +/-0.1mm

Order reference: 订货资料:

Colors available: black,white,yellow,green,blue,brown,gray,orange,violet,yellow-green

可选颜色: 黑, 白, 黄, 绿, 蓝, 棕, 灰, 橙, 紫, 黄绿。

Delivery : 交货日期:

7 days after accepting purchase orders.

接到订单后 7 天。