


特种交联聚烯烃绝缘低压汽车电线 SXL
Special XLPO Insulation Auto Wire with low tension - SXL

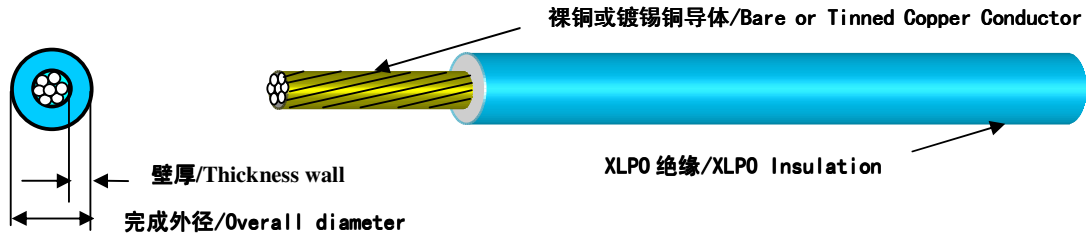

产品执行标准/Product executive standard:

SAE J 1128/2005 低压初级电缆/Low Tension Primary Cable

Description:

Bare or Tinned stranded copper conductor; 20-4AWG
 Temperature range: -40~125℃; Rated voltage: 50 volts
 Thermosetting and good mechanical characters
 XLPO material of insulation.
 Easy stripping and cutting.
 Resistant to acids, alkalis, oils, moisture and fungi.

说明:

导体使用裸铜或镀锡铜绞线，20-4AWG
 温度范围：-40~125℃；额定电压：50V
 交联聚烯烃绝缘，优良热稳定性和机械性能
 易开线和剥皮。
 抗酸碱，耐油及防潮霉性能好。

Application:

It's applicable to low tension primary wire of electric system for auto within.

应用:

适用于汽车内部电气系统用低压电线

Specification: 技术参数:

型号 Type	线规 AWG	导体结构 Conductor size (No./AWG)	导体外径 Conductor Dia.(mm)	绝缘厚度 Insulation thickness (mm)		完成外径 Overall diameter (mm)		包装尺寸 Package size FT/R
				Average	Min.	Average	Max.	
SXL-4	4	420/30	6.80	1.50	1.05	9.80	10.00	500
SXL-6	6	266/30	5.40	1.12	0.78	7.65	7.85	500
SXL-8	8	168/30	3.80	1.08	0.76	6.00	6.20	500
SXL-10	10	105/30	3.00	1.04	0.66	5.10	5.30	500
SXL-12	12	65 / 30	2.40	0.94	0.66	4.30	4.60	1000
SXL-14	14	41 / 30	1.90	0.89	0.62	3.70	3.90	1000
SXL-16	16	26 / 30	1.50	0.81	0.57	3.10	3.40	1000
SXL-18	18	16 / 30	1.20	0.76	0.53	2.70	3.00	2000
SXL-20	20	7 / 28	0.96	0.74	0.52	2.40	2.80	2000

单支导体公差/Conductor tolerance: +/-0.005mm

订货资料/Order reference: :

可选颜色 (SAE 标准色系): 黑, 白, 黄, 绿, 蓝, 棕, 灰, 橙, 紫, 黄绿。

Colors available: black, white, yellow, green, blue, brown, gray, orange, violet, yellow-green

交货日期/Delivery :7 days after accepting purchase orders. 接到订单后 7 天。