


QFR 型公路车辆用 低压电线

PVC insulation Auto Wire with QFR

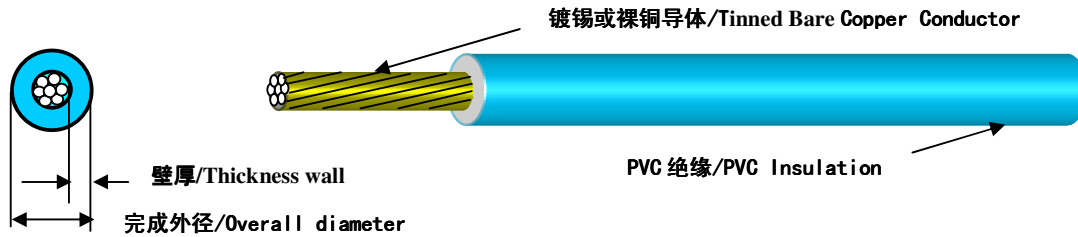

产品执行标准/Product executive standard:

GB 9328-88

Description:

Bare or tinned stranded copper conductor; 0.2-120 spmm

Temperature range: 70

Thermosetting and good mechanical characters

PVC material of insulation.

Easy stripping and cutting.

Resistant to acids, alkalis, oils, moisture and fungi.

Application:

It's applicable to low tension primary wire of electric system for auto within.

Specification: 技术参数:

规格 SPEC	导体结构 Conductor size (No./AWG)	导体外径 Conductor Dia.(mm)	绝缘厚度 Insulation thickness (mm)	完成外径 Overall diameter (mm)	包装尺寸 Package size M/R
			Average	Average	
0.20	12/0.15	0.60	0.30	1.2~1.3	1000
0.30	16/0.15	0.70	0.30	1.3~1.4	1000
0.40	23/0.15	0.83	0.30	1.4~1.6	1000
0.50	16/0.20	1.00	0.60	2.2~2.4	1000
0.75	24/0.20	1.15	0.60	2.4~2.6	1000
0.85	27/0.20	1.20	0.60	2.5~2.7	1000
1.00	32/0.20	1.35	0.60	2.6~2.8	1000
1.25	40/0.20	1.45	0.60	2.7~2.9	1000
1.50	30/0.25	1.70	0.60	2.9~3.1	500
2.00	41/0.254	1.85	0.60	3.2~3.4	500
2.50	49/0.25	2.00	0.70	3.5~3.7	500
3.00	61/0.25	2.25	0.70	3.7~3.9	500
4.00	56/0.30	2.75	0.80	4.3~4.5	500
5.00	71/0.30	2.90	0.80	4.6~4.8	200
6.00	84/0.30	3.30	0.80	4.8~5.1	200
8.00	50/0.45	3.70	0.90	5.5~5.7	200
10.00	84/0.40	4.25	1.00	6.3~6.7	200
16.00	126/0.40	5.90	1.00	8.3~8.5	100
25.00	196/0.40	7.40	1.30	10.0~10.6	100

说明:

导体使用裸铜或镀锡铜绞线, 0.2-120 mm²

温度范围: 70

PVC 绝缘, 优良热稳定性和机械性能

易开线和剥皮。

抗酸碱, 耐油及防潮霉性能好。

应用:

适用于汽车内部电气系统及仪表用低压电线

单支导体公差/Conductor tolerance: +/-0.01mm, 导线外径公差 订货资料/Order reference: :

可选颜色 (SAE 标准色系): 黑, 白, 黄, 绿, 蓝, 棕, 灰, 橙, 紫, 黄绿。

Colors available: black, white, yellow, green, blue, brown, gray, orange, violet, yellow-green

交货日期/Delivery :7 days after accepting purchase orders. 接到订单后 7 天。