


**通用交联聚烯烃绝缘起动机或接地装置电缆 STX**  
**All-purpose XLPE insulation Auto Wire with low tension - STX**

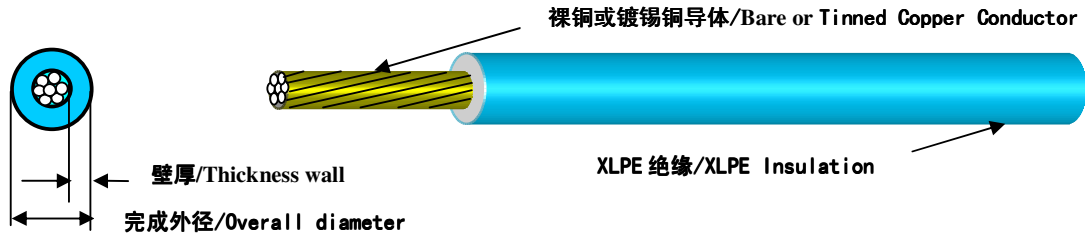

**产品执行标准/Product executive standard:**

SAE J 1127/2005 低压初级电缆/Low Tension Primary Cable

**Description:**

Bare or Tinned stranded copper conductor; 6-4/0 AWG  
 Temperature range: -40~125℃;  
 Thermosetting and good mechanical characters  
 XLPE material of insulation.  
 Easy stripping and cutting.  
 Resistant to acids, alkalis, oils, moisture and fungi.

**说明:**

导体使用裸铜或镀锡铜绞线，6-4/0AWG  
 温度范围：-40~125℃；  
 XLPE 绝缘，优良热稳定性和机械性能  
 易开线和剥皮。  
 抗酸碱，耐油及防潮霉性能好。

**Application:**

It's applicable to low tension primary wire of electric system for auto within.

**应用:**

适用于汽车内部电气系统用低压电线

**Specification: 技术参数:**

型号 Type	线规 AWG	导体结构 Conductor size (No./AWG)	导体外径 Conductor Dia.(mm)	绝缘厚度 Insulation thickness (mm)		完成外径 Overall diameter (mm)		包装尺寸 Package size FT/R
				Average	Min.	Min	Max.	
STX-6	6	7/19/0.361	5.42	1.09	0.76	7.20	7.80	500
STX-4	4	7/19/0.455	6.86	1.12	0.78	8.90	9.50	500
STX-2	2	7/95/0.254	8.58	1.12	0.78	10.40	11.00	500
STX-1	1	7/112/0.254	9.30	1.12	0.78	11.40	12.00	500

单支导体公差/Conductor tolerance: +/-0.005mm 订货资料/Order reference: :

可选颜色 (SAE 标准色系): 黑, 白, 黄, 绿, 蓝, 棕, 灰, 橙, 紫, 黄绿。

Colors available: black, white, yellow, green, blue, brown, gray, orange, violet, yellow-green

交货日期/Delivery :7 days after accepting purchase orders. 接到订单后 7 天。