


## WL-PVC

### PVC Tubing

#### Features:

1. Material: polyvinyl chloride, called PVC
2. Working temperature: -30~+105 °C
3. Flexible, Soft, Flame retardant
4. Color: Black, clear, red, blue, green, etc.

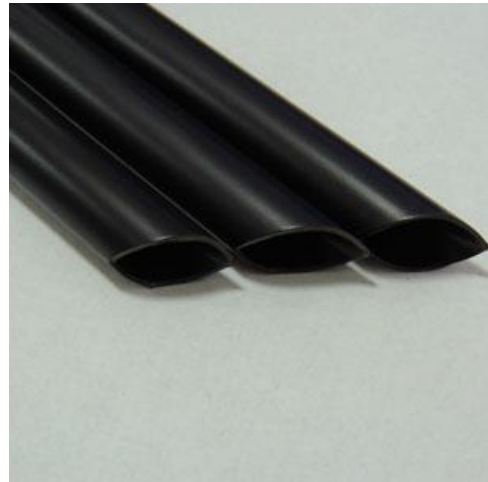

#### Technical Data:

Property	Typical Performance
Yield Strength	≥10.4MPa
Breakage Elongation (%)	≥100%
Voltage	≥300V
Flexibility	Outstanding
Flame resistance	VW-1

#### Dimensions:

I.D.(mm)	Wall thickness(mm)		Packing size (m/r)
	WL-300	WL-600	
0.80±0.1	0.25±0.05	0.40±0.05	500
1.0±0.1	0.30±0.05	0.40±0.05	500
1.5±0.1	0.33±0.05	0.45±0.05	400
2.0±0.2	0.33±0.05	0.50±0.05	400
2.5±0.2	0.35±0.05	0.50±0.05	300
3.0±0.2	0.40±0.05	0.50±0.05	300
3.5±0.2	0.40±0.05	0.50±0.05	300
4.0±0.2	0.45±0.05	0.55±0.05	300
4.5±0.3	0.45±0.05	0.55±0.05	300
5.0±0.3	0.45±0.05	0.55±0.05	300
6.0±0.3	0.45±0.05	0.55±0.05	300
7.0±0.3	0.45±0.05	0.55±0.05	150
8.0±0.35	0.45±0.05	0.55±0.05	150
9.0±0.35	0.50±0.05	0.60±0.05	150

10.0±0.35	0.55±0.10	0.65±0.10	150
11.0±0.40	0.55±0.10	0.65±0.10	150
12.0±0.40	0.55±0.10	0.65±0.10	150
13.0±0.40	0.55±0.10	0.65±0.10	150
14.0±0.40	0.55±0.10	0.65±0.10	150
15.0±0.40	0.60±0.10	0.70±0.10	50
16.0±0.40	0.60±0.10	0.70±0.10	50
17.0±0.40	0.60±0.10	0.70±0.10	50
18.0±0.40	0.60±0.10	0.70±0.10	50
19.0±0.40	0.65±0.10	0.75±0.10	50
20.0±0.50	0.65±0.10	0.75±0.10	50
21.0±0.50	0.65±0.10	0.75±0.10	50
22.0±0.50	0.70±0.10	0.80±0.10	50
23.0±0.50	0.70±0.10	0.80±0.10	50
24.0±0.50	0.75±0.10	0.85±0.10	50
25.0±0.50	0.75±0.10	0.85±0.10	50
26.0±0.50	0.85±0.10	0.85±0.10	50